



RAIL MOUNTING TRANSMITTER

Mp88820-R

2-wire rail mounting transmitter

Mp88820-R

- Microprocessor based
- RTD inputs
- Fully linearized
- RFI / EMI protected
- High accuracy (Typical 0.2%)
- 5 Year warranty



Specifications

Input RTD	Pt100, Pt250, Pt500, Pt1000, Ni100, Ni500, Ni1000
Other input	Ohm
Minimum Span	25°C (45°F)
Output	4...20 mA or 20...4 mA
Linearization	On / Off
Supply	5...40 VDC, Polarity Protected
Sensor Lead Resistance, RTD	500 Ohm max.
Open Circuit Detection	Upscale / Downscale
Load Capability	Vbat-5V / 20 mA
Startup Time	10 sec.
Warmup Time	2 Min.
Ambient Operating Temp.	-40...+ 85°C (-40...+ 185°F)
Ingress Protection	IP30
Storage Temperature	-40...+100°C (-40...+ 212°F)
Housing Material	Makrolon
Housing Dimensions	22.5 x 75 x 99 mm (0.89" x 2.92" x 3.9")

Order information and options

Example:


Model Mp88820-R -IF

Options:

-IF = Interface and software



Dimensions

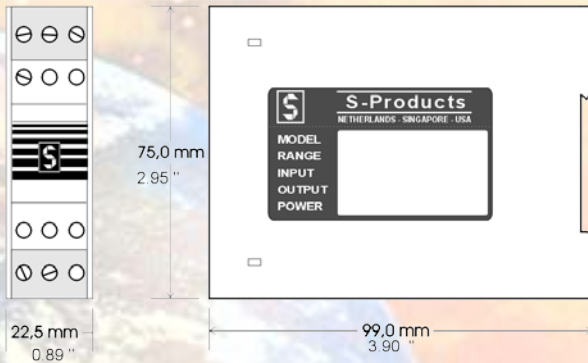

Sensor ranges

Sensor type	Temp. Min.		Temp. Max.		Span Min.	
	°C	°F	°C	°F	°C	°F
Pt100 IEC751	-200	-328	850	1562	25	45
Pt250 IEC751	-200	-328	850	1562	25	45
Pt500 IEC751	-200	-328	850	1562	25	45
Pt1000 IEC751	-200	-328	850	1562	25	45
Ni100 IEC751	-60	-76	250	482	25	45
Ni500 IEC751	-60	-76	250	482	25	45
Ni1000 IEC751	-60	-76	250	482	25	45
Ohm	0 Ω		9999 Ω		100 Ω	

